



Ferrofish - Verto 32

Quickguide

Radiopark

imagesound

tonique

Sonica

Part of the Imagesound Group


AD/DA Converter – digital

Verto 32 with up to 32 outputs / DANTE

front side



back side

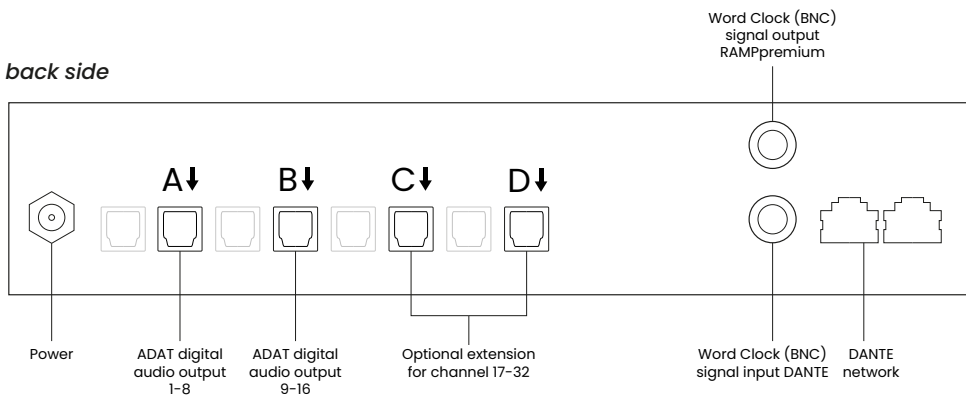

TECHNICAL SPECIFICATIONS

32 DANTE outputs

1U, optical ADAT IN/OUT, 2 x RJ45 DANTE Port (Ethernet)

44.1 kHz to 96 kHz sample frequency

Dante I/O: 4 x TOSLINK I/O Channel 32, Count @48 kHz: 32, I/O Channel Count @96kHz:

Power supply: Input 100–240V, 2A, 60/50Hz; Output: 12V, 5A

Optional: 19" Rack mounting kit

Dimensions: 1U (4,5cm), depth: 22cm